

## D6572II

### 8 Channel Power Supply Sequence Controller



#### Description

D6572II Sequence Controller support independent eight high-power power output, can meet a variety of three-stage power sockets and two European-style round head sockets. It can be widely used in multimedia classrooms, multi-function halls, conference rooms, projection splicing, video conferencing, monitoring center, building control, management and command center and other fields.

#### Features


- Independent 8-channel high power output
- Universal socket which supports multiple 3-pole power socket and 2-pole European socket
- Maximal output of single channel is 10A
- Total input current capacity is 16A
- On/off status of each channel on front panel for monitor use
- One-click switch to turn on/off each channel
- Can power on/off the amplifier in sequence to avoid high current to damage the amplifier or the power supply system

#### Specifications

Model	D6572II
Power Output	8 channel, universal socket
Single-channel Maximum load	10A
Control Manner	Start up by manual sequence, external short circuit signal trigger
Power Capacity	Total capacity: 220V, 16A
Input Power	AC220/50Hz
Sequence Interval	0.4-0.5s
Package Size (L×W×H) (mm)	560×330×130

Machine Size (L×W×H) (mm)	484×230×44
Net Weight	4kg
Gross Weight	6kg

## Front / Rear Panel

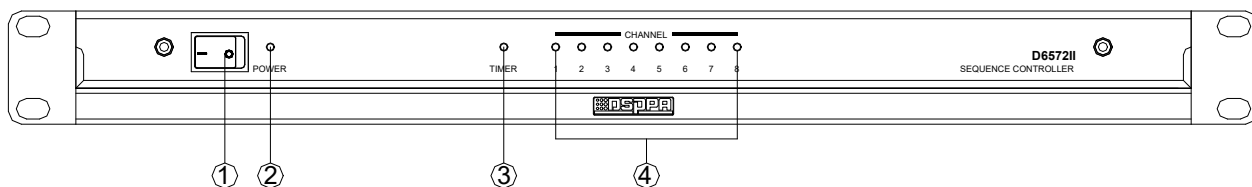

### ① Power Switch


Press “—” to turn on the power, press “O” to turn off the power.

### ② Power Indicator

When the power supply is turned on, the indicator lights are on, and when the power supply is turned off, the indicator lights are off.

### ③ Timer Input Indicator

### ④ Output Indicators

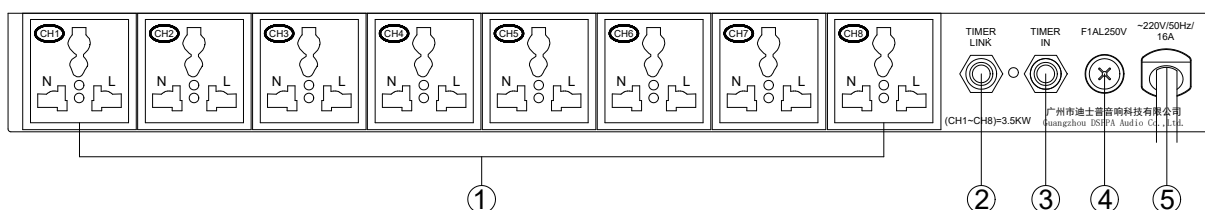

### ① 8 sequence power output interface

### ② Timing power trigger signal connection interface

### ③ Timing power trigger signal input interface

### ④ Power fuse

After the power fuse is fused, replace it with a fuse of the same size, and if the fuse is repeatedly fused, there must be a short-circuit failure inside the machine. Remove the failure and load the fuse of the same size.

### ⑤ Power input cable