

DSP916

40W Coaxial Ceiling Speaker with Power Tap



Description

This product is a ceiling speaker which is suitable for different public address applications. It can be switched between the ohms terminal 8Ω and the voltage terminal 70/100V. The built-in 6.5"×1 and 1"×1 speaker drivers are designed of wide frequency response 50Hz-20kHz. It's made of high quality ABS material, which ensures long-term durability, and will never be out of shape or fading.

Features

- Working voltage 70/100V or 4-16 Ω , rated power 40W.
- MAX. SPL.: 107±2dB, effective frequency range: 50Hz-20kHz.
- With coaxial structure for two units, with clear sound and high sensitivity (91±2dB).
- 4.2kg in weight, high-quality engineering plastic injection modeling, durable, no deformation, no fading.


Specifications

Model	DSP916
Rated Power (RMS)	40W
Working Voltage	70/100V, 4-16 Ω
Sensitivity (1m, 1W)	91 ± 2dB
MAX. SPL. (1m)	107 ± 2dB
Frequency Response	50Hz-20kHz
Weight	4.2kg

Product Information


Frequency Response

(dB SPL, 1W, 1m)

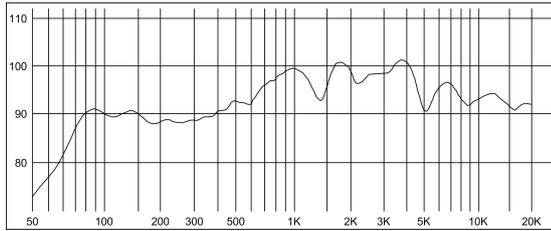

Distortion

(THD < 1.5% 1W, 1m, 100Hz-10kHz)

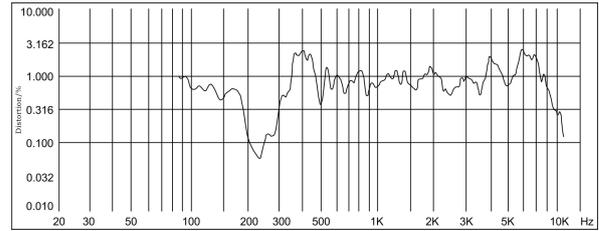

Remove Mesh Cover

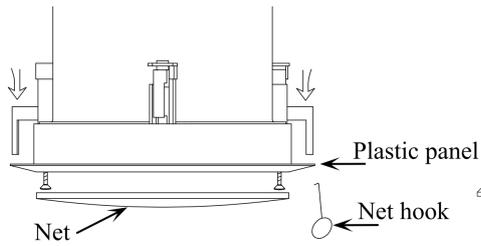


Figure ①

Installation Hole

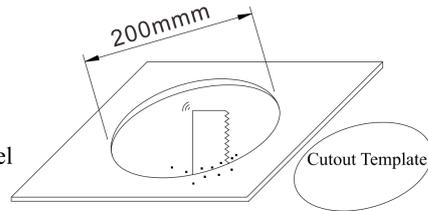


Figure ②

Product Dimensions

