

DSP5011

6.5" 6W Ceiling Speaker



Description

This stylish ceiling speaker features a thin-edge design and RAL white coating, equipped with a high-performance 6.5" speaker that meets international power standards, ensuring high reliability and long service life.

Features

- Adopt the fashionable thin-edge and the carbon alloy aluminum mesh design with the RAL white coating so as to integrate with any indoor place perfectly.
- Equipped with a 6.5" full-range designed loudspeaker with magnetic circuit encapsulated with special engineering plastic process, and the drum paper formed with tripping and hot pressing of algae salvaged organisms, for the purpose of super-strong reproduction of voice and music.
- It is in conformity with the IEC 268-5 power handling capacity (PHC) standard, and able to operate continuously for 100 hours and carry out simulating acoustic feedback exposure (SAFE) test. It is able to bear the double rated powers within a short period, so as to ensure the high reliability of the loudspeaker under extreme conditions, prolong the service life, and reduce the possibility of occurrence of fault or degradation of performance to a great extent.


Specifications

Model	DSP5011
Speaker Unit	6.5"×1
Rated Power (RMS)	6W
Rated Voltage	70V/100V
Sensitivity (1m, 1W)	92±2dB

MAX. SPL. (1m)	100±2dB
Frequency Response	140Hz-16kHz
Dimensions	Φ190×79mm
Weight	0.7kg

Technical Parameters

Frequency Response
(dB SPL, 1W, 1m)

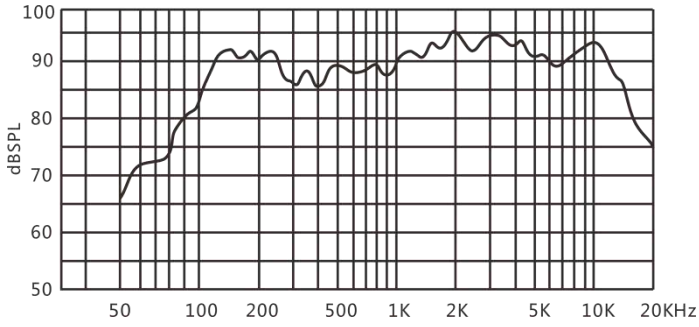

Distortion

(THD < 5% 1W, 1m, 100Hz-10kHz)

