

DSP6030

6.5 Inch 40W Quick-Install Ceiling Speaker



Description

The DSP6030 40W Quick-Install Ceiling Speaker delivers high-quality sound with effortless installation. Equipped with a coaxial unit, it features a 6.5-inch main driver and a 1-inch tweeter, supported by an internal crossover circuit for pure and balanced audio output. With a rated power of 40W and an adjustable power dial, it adapts seamlessly to various environments. Its wide frequency response range (50Hz–19kHz), sensitivity of 86dB±3dB, and maximum sound pressure level of 102dB±3dB ensure outstanding audio performance. For personalized sound, the DSP6030 allows manual adjustment of bass and treble, making it ideal for hotels, restaurants, clubs, and more.


Features

- Rated Power: 40W, Support 8Ω/70V/100V
- 6.5 inch frameless, iron mesh cover
- Max. SPL: 102±2dB
- Frequency Response: 50Hz - 19kHz
- Sensitivity: 86±2dB
- With speaker line terminal
- In-ceiling quick installation


Model	DSP6030
Drive Unit	6.5"×1, 1"×1
Rated Power	40W
Input	8Ω/70V/100V
Power Tap	8Ω/40W/20W/10W
Frequency Response	50Hz-19kHz
Sensitivity(dB,1m,1W)	86dB±3dB
Max. SPL (1m)	102dB±3dB
Product Size	∅229mm×114mm
Cutout Size	∅204mm×110mm

Product Information


Frequency Response Characteristic
(dB SPL, 1W,1m)

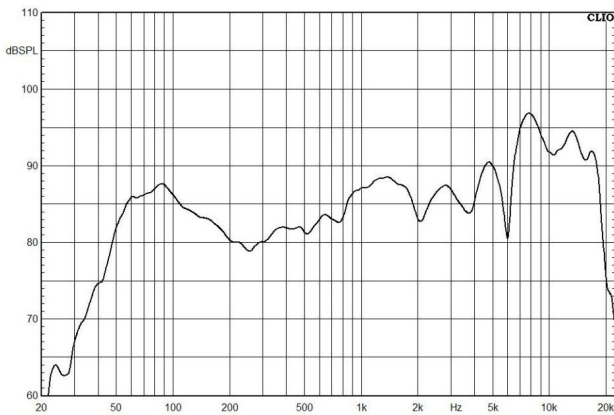

Distortion Characteristic
(THD< 1.5%, 1W, 1m, 100Hz-10kHz)

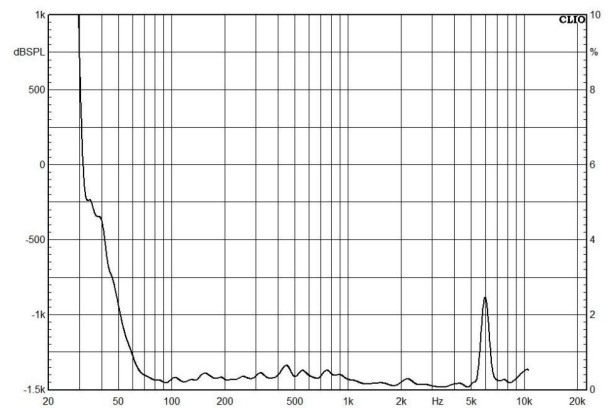

Installation Method

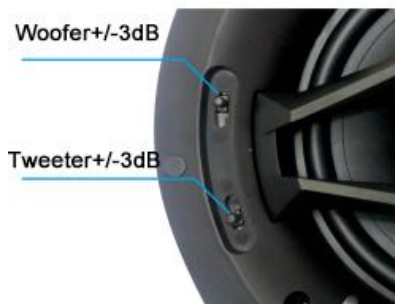

1. Lift the mounting bracket upwards.



2. Rotate the mounting bracket to the left.



3. Rotate it to the right and secure it in place.